

# XAP<sup>®</sup>

## XAP Net Ethernet Control Interface

**ClearOne.**

An advanced control interface for ClearOne's industry-leading professional conferencing line. The XAP Net brings Ethernet connectivity to XAP and PSR1212 audio systems, allowing remote programming, upgrades, and diagnostic functions.



## ADVANCED CONTROL AND REMOTE SYSTEM MANAGEMENT

### APPLICATIONS

Installations with multiple XAP/PSR1212 units

Organizations with remotely managed locations

Companies employing centralized network management

### ADVANTAGES

#### Remote System Management


- + Connect to multiple linked XAP and PSR1212 systems to adjust system settings, route audio inputs, view meters and upgrade firmware via Ethernet
- + Remotely run presets and macros, adjust input and output gain and view unit and site information
- + Solve system problems faster and reduce on-site visits with centralized management and control

#### Access Flexibility


- + Configure XAP and PSR1212 systems through G-Ware™ configuration software for complete system configuration and control
- + With XAP Net's built-in web server, remote system access also available through web browser without using G-Ware
- + Manage through LAN or WAN connection - features support for common network control and management protocols
- + Connect to XAP Net through built-in Ethernet interface, or connect directly with PC via RS-232 serial port

→ INSTALLATION

XAP Net LAN connection

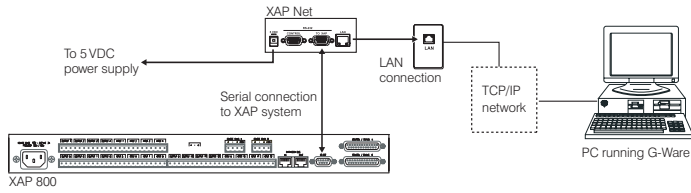

XAP Net serial connection

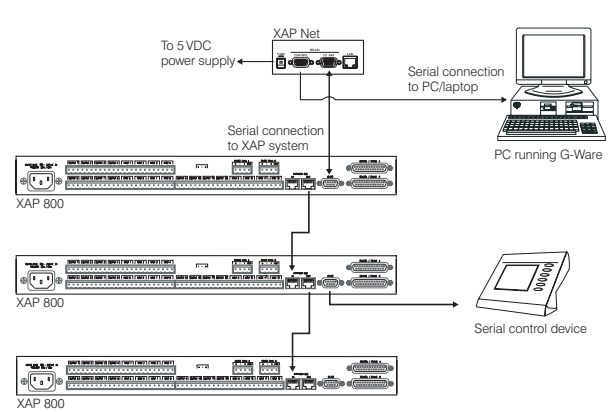

→ SPECIFICATIONS



**LAN Support**

Network protocols: TCP/IP, DNS, UDP, DHCP, ARP, HTTP, ICMP

**Ethernet**

Type: 10/100 BASE T  
Auto sensing  
Connector: RJ-45

**RS-232**

DB9 Female  
BPS selectable  
9.6 k/19.2 k/38.4 k/57.6 k  
CTS/RTS Flow control  
DB9 Male  
Auto configured for XAP

**LAN LEDs**

Good Link (Green)  
Speed (Yellow)

**Front Panel LEDs**

Active  
Illuminates (green) when active  
Status  
Green = Connected to XAP  
Red = Ready, no XAP connection

**Compliance**

FCC  
CSA  
CE

**Environmental**

Operating Temperature:  
32-122° F (0-50° C)  
Humidity: 15%-80%

**Power**

External power supply  
100-240 VAC; 50/60 Hz; 5 W

**Dimensions (W x D x H)**

4" x 4.25" x 1.5"  
(10.2 cm x 10.8 cm x 3.8 cm)

**Model Number**

910-151-150 XAP Net Ethernet  
Control Interface

→ CLEARONE LOCATIONS

**Headquarters:**  
Salt Lake City, UT USA  
1825 Research Way  
Salt Lake City, UT 84119  
Tel: 801-975-7200;  
800-945-7730  
Fax: 801-977-0087  
sales@clearone.com

**Champlin, MN USA**  
Tel: 801-942-3776  
sales@clearone.com

**Latin America Offices**  
Tel: 801-974-3621  
global@clearone.com

**London, UK**  
Tel: 801-974-3792  
global@clearone.com

**Hong Kong**  
Tel: 801-303-3441  
global@clearone.com

**Singapore**  
Tel: 801-303-3495  
global@clearone.com